









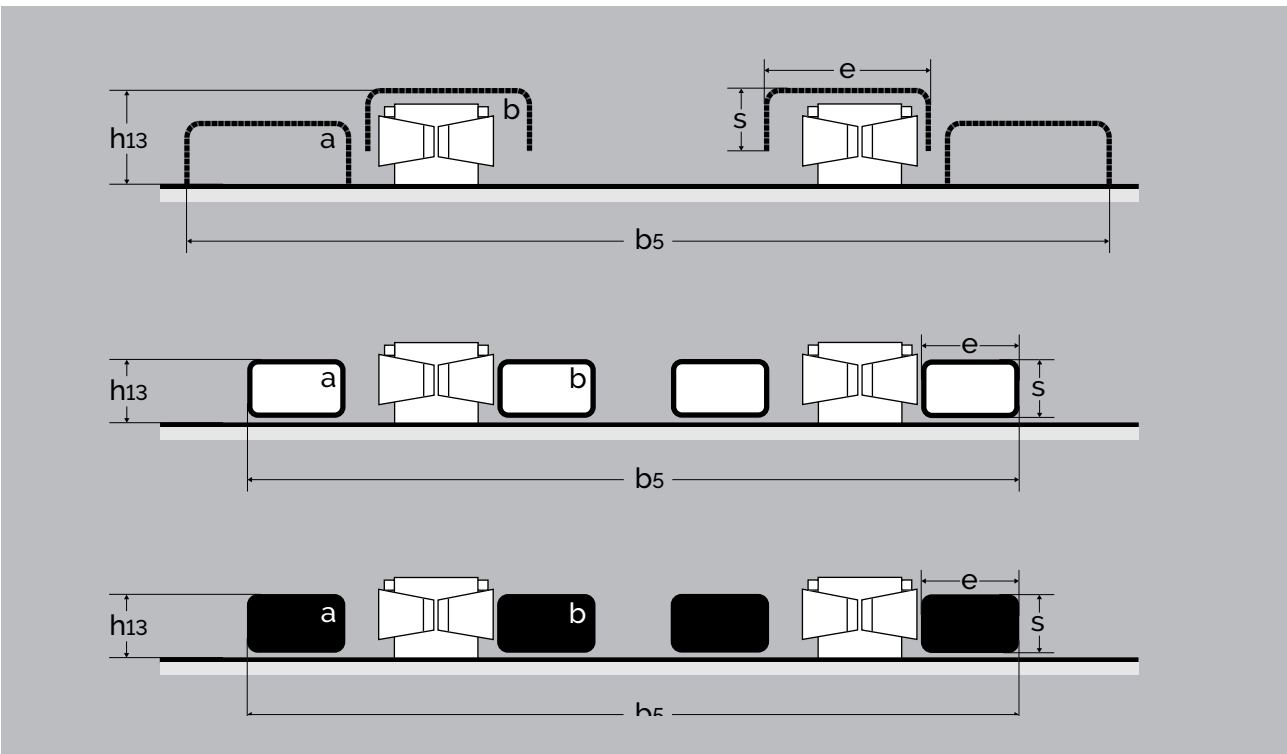

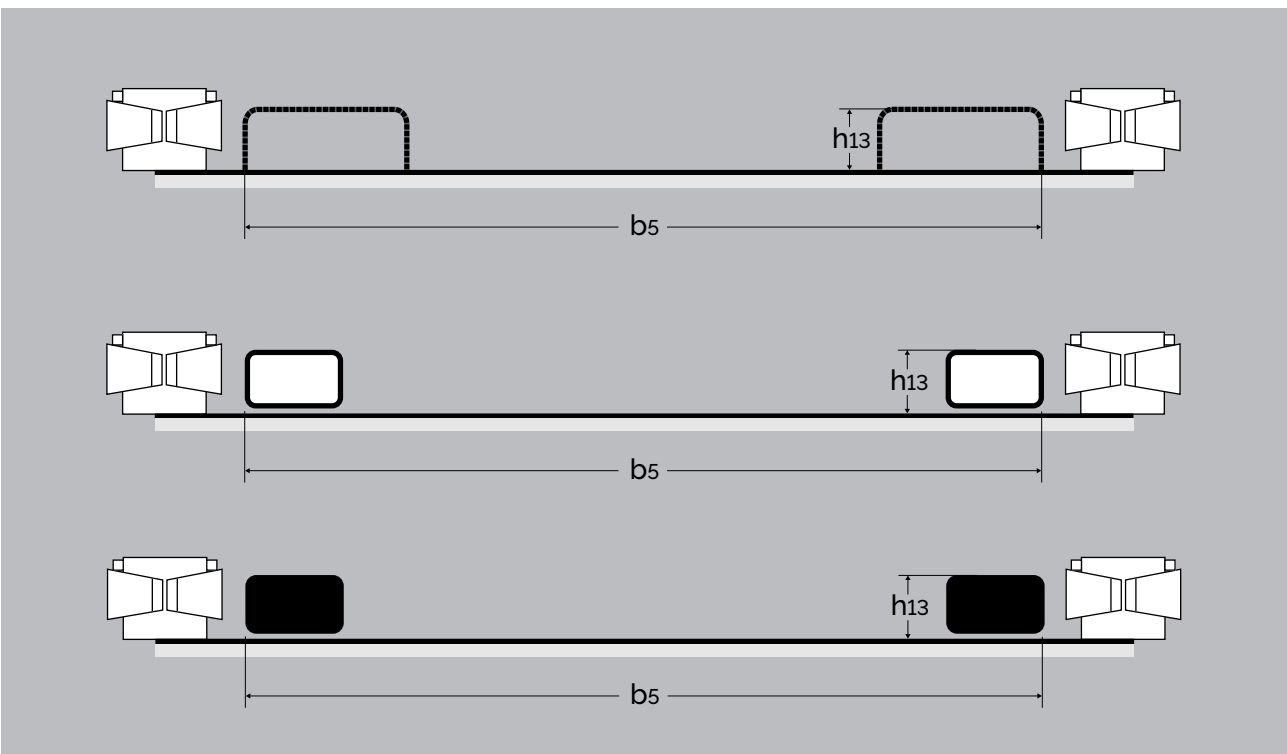



WITHOUT STRADDLE



WITH STRADDLE



PRODUCT (measured in mm)		FORK CARRIAGE 440 mm <sup>1</sup>			FORK CARRIAGE 690 mm <sup>2</sup>		
Fork style		Wrap-over 	Bar 	Chisel 	Wrap-over 	Bar 	Chisel 
Size of wheel		Ø85			Ø85		
Fork span	b <sub>s</sub>	350-560	230-430	230-430	350-800	230-680	230-680
Fork span - a	b <sub>s</sub>						
Fork span - b	b <sub>s</sub>	560	230-300	230-300	560	230-300	230-300
Lowered fork height - straddle legs	h <sub>13</sub>	85	85	60	65	65	40
Lowered fork height - a	h <sub>13</sub>						
Lowered fork height - b	h <sub>13</sub>	90	85	60	90	65	40
Fork width	e	163	100	100	163	100	100
Fork height	s	61	60	35	61	60	35

PRODUCT (measured in mm)		FORK CARRIAGE 810 mm <sup>3</sup>			FORK CARRIAGE 946 mm		
Fork style		Wrap-over 	Bar 	Chisel 	Wrap-over 	Bar 	Chisel 
Size of wheel		Ø85			Ø85		
Fork span	b <sub>s</sub>	350-920	230-800	230-800	530-1050	420-930	420-930
Fork span - a	b <sub>s</sub>	876-920	750-800	750-800	876-1050	750-930	750-930
Fork span - b	b <sub>s</sub>	560	230-300	230-300	560		
Lowered fork height - straddle legs	h <sub>13</sub>	65	65	40	65	65	40
Lowered fork height - a	h <sub>13</sub>	65	65	40	65	65	40
Lowered fork height - b	h <sub>13</sub>	90	65	40			
Fork width	e	163	100	100	163	100	100
Fork height	s	61	60	35	61	60	35

<sup>1</sup> Standard carriage for LF MINI and ELF with capacity 1000 kg and lifting height 920 and 1650 mm.

<sup>2</sup> Standard carriage for Logiflex straddle stackers with wrap-over forks.

<sup>3</sup> Standard carriage for Logiflex straddle stackers with bar and chisel forks.

Standard carriage for Logiflex stackers without straddle legs (but fork carriage 440 mm for LF MINI and ELF with capacity 1000 kg and lifting height 920 and 1650 mm).